


15 pin Male D
connects to TBC
Control Channel
Output on TC400D

9 pin Male D
connects to DPS
Remote Input port

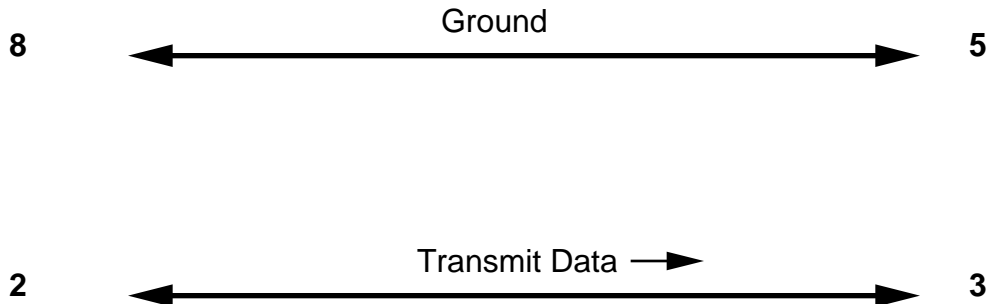

1. DPS465 must be set to **RS232, 9600 baud** , none, 8, 1 as per *Remote Control* section of *DPS465 Operators Manual*.
2. Use TC400 D software version 2.3 or later. Set TC400D *Machine Type* to **DPS465**. In the address menu of the DPS465, set the address to 01h or 1. Each dps465 is controlled through its own rs232 line to the TC400D.
3. DPS465 Sync phase, SC phase, Freeze, and bypass are also controlled by the TC400D.

ENSEMBLE

DESIGNS

TC400D Interface to 9 pin DPS 465

rev. Nov. 19, 1998

October 31, 1994